


Industrial Lighting



- Specially designed passive heat sink for optimum heat dissipation
- Injection moulded polycarbonate diffuser with high transmission index delivering superior light output
- Rated life of L70 @50000 hrs
- Loop-in loop-out wiring optional


AREA OF APPLICATIONS

Sheds Warehouses
Workshops Factories

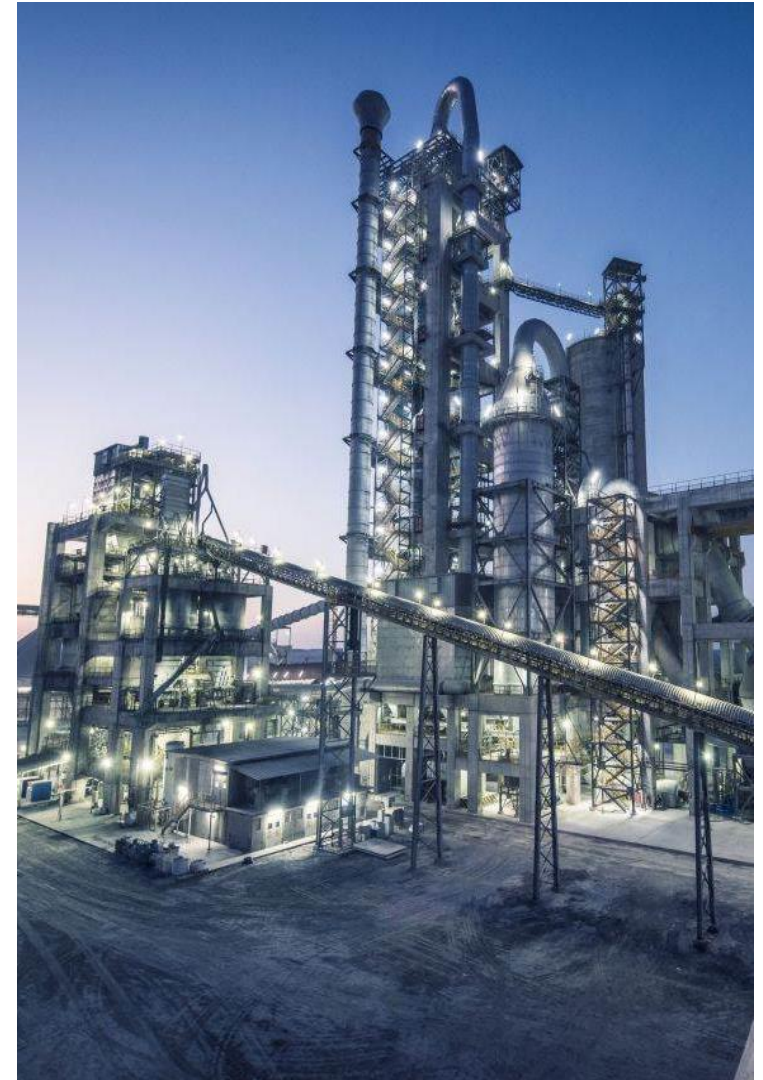

Industrial Lighting

SYSTEM WATTAGE	LUMINAIRE EFFICACY	WORKING VOLTAGE	HOUSING	LIFE SPAN	COLOR TEMPERATURE	LED CRI	OPERATING TEMPERATURE	POWER FACTOR	IP RATING	ORDERING CODE
30W	> 105	140-270	AL PDC	>50000	3000-6500	>70%	-20+50	>0.95	IP 65	273321
40W	> 105	140-270	AL PDC	>50000	3000-6500	>70%	-20+50	>0.95	IP 65	273322
70W	> 105	140-270	AL PDC	>50000	3000-6500	>70%	-20+50	>0.95	IP 65	273323



Watt	30W	40W	70W
Length	160	160	160
Width	160	160	160
Height	270	270	270

All dimensions are in mm

Note: Design and Specifications are subject to change without prior notice. For other color Temperature requirements, please contact for Ordering Data.